

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number  
WO 2005/062275 A1

(51) International Patent Classification<sup>7</sup>: G08G 1/052, 1/01 (74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367 Collins Street, Melbourne, Victoria 3000 (AU).

(21) International Application Number: PCT/AU2004/001815 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 21 December 2004 (21.12.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English (26) Publication Language: English

(30) Priority Data: 2003907181 24 December 2003 (24.12.2003) AU

(71) Applicant (for all designated States except US): RED-FLEX TRAFFIC SYSTEMS PTY LTD [AU/AU]; 31 Market Street, South Melbourne, Victoria 3205 (AU). (72) Inventors; and


(75) Inventors/Applicants (for US only): ONEA, Adrian [AU/AU]; 30 Bridge Street, Brighton, Victoria 3185 (AU). FIUSCO, Ricardo, John [AU/AU]; 6 George Street, Ashwood, Victoria 3147 (AU).

Published:

— with international search report

[Continued on next page]

(54) Title: VEHICLE SPEED DETERMINATION SYSTEM AND METHOD

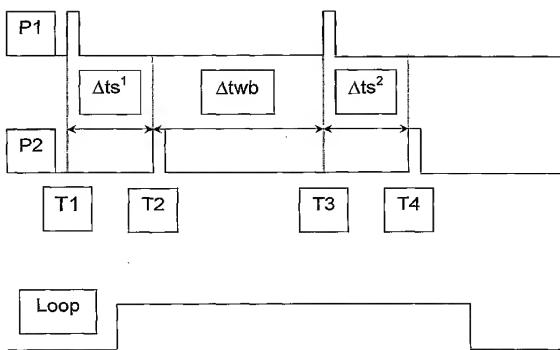

LEGEND

P1 Piezoelectric Sensor 1  
P2 Piezoelectric Sensor 2  
Loop Inductive Loop  
T1 Time when Front Axle triggers P1  
T2 Time when Front Axle triggers P2  
T3 Time when Rear Axle triggers P1  
T4 Time when Rear Axle triggers P2  
 $\Delta ts^1$  Time Interval used to measure the Speed of the Front Axle (T2-T1)  
 $\Delta ts^2$  Time Interval used to measure the Speed of the Rear Axle (T4-T3)  
 $\Delta twb$  Time Interval used to measure the Wheel Base (T3-T2)  
 $cs^1$  Count Speed 1 is the Number of Interval Counts between T2 and T1 ( $\Delta ts^1/freq$ )  
 $cs^2$  Count Speed 2 is the Number of Interval Counts between T4 and T3 ( $\Delta ts^2/freq$ )  
 $cswb$  Count Speed Wheel Base is the Number of Interval Counts between T3 and T2 ( $\Delta twb/freq$ )  
 $freq$  Reference Crystal Frequency  
d Distance separating P1 and P2

WO 2005/062275 A1

(57) Abstract: A method for verifying the speed of a vehicle having at least a front axle and a rear axle, using sensors separated by a distance. The presence of the vehicle is sensed and an image of the vehicle is recorded to enable the vehicle to be identified. The sensors are triggered to emit signals which are received by the system to enable the speed of the vehicle to be determined. The signals are also used to determine a wheel base measurement for the vehicle. The determined wheel base measurement is compared to an actual wheel base measurement of the vehicle being sensed and any discrepancy between them is taken to be indicative of potential errors in the speed of the vehicle determined by the method. In one embodiment, a database is provided, the database containing data relating to various vehicle types associated with vehicle specifications including a validated wheel base measurement for each vehicle type.



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*